



CUANTIFICACIÓN

CODIGO	CONCEPTO	EJE	TRAMO	LARGO	ANCHO	ALTO	PZA	U.M	RESULTADO	OBSERVACIONES
	LIMPIEZA, TRAZO Y NIVELACION	A-B	1-2	10.00	8.00		1	M ²	80.00	
	DESPALME	A-B	1-2	10.00	8.00	6.25	1	M ³	20.00	
	EXCAVACIÓN	A-B	1-2	10.00	1.20	1.26	2	M ³	30.24	
		1-2	A-B	5.60	1.20	1.26	2	M ³	16.94	
									47.18	
	PLANTILLA MATERIAL MEDRAPO	A-B	1-2	10.00	1.20	0.20	2	M ³	4.8	
		1-2	A-B	5.6	1.20	0.20	2	M ³	2.69	
									7.49 M ³	
	PLANTILLA DE CONCRETO	A-B	1-2	10.00	1.20	0.20	2	M ²	24	
		1-2	A-B	5.60	1.20		2	M ²	13.44	
									37.44	

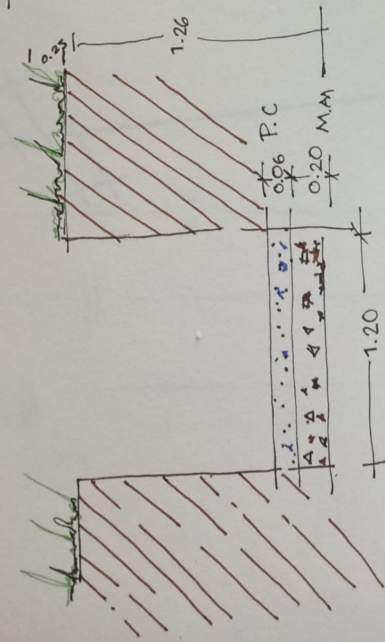

CODIGO	CONCEPTO	EJE	TRAMO	LARGO	ANCHO	ALTO	PZA	U.M	RESULTADO	OBSERVACIONES
	TRAMPIEZA, TRAZO Y NIVELACION	A-B	1-3	12.00	9.00		1	M ²	108	
	DESPALME	A-B	1-3	12.00	9.00	0.25	1	M ³	27m ³	
	EXCAVACION	A-B	1-3	12.00	1.30	1.46	2	M ³	45.55	
		1-3	A-B	6.40	1.30	1.46	3	M ³	36.44	
									<u>81.99</u>	
	PLANTILLA M.M	A-B	1-3	12.00	1.30	0.20	2	M ³	6.24	
		1-3	A-B	6.40	1.30	0.20	3	M ³	4.99	
									<u>11.23</u>	
	PLANTILLA DE CONCRETO	A-B	1-3	12.00	1.30		2	M ²	31.2	
		1-3	A-B	6.40	1.30		3	M ²	24.96	
									<u>56.16</u>	

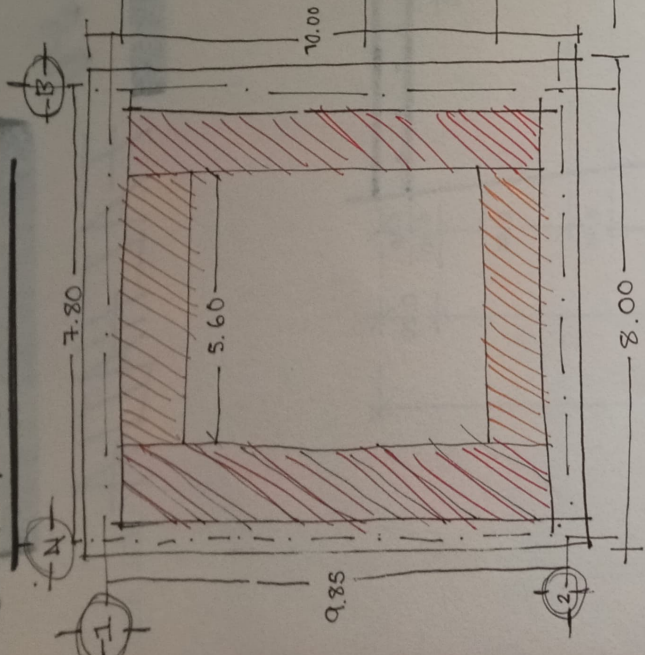